



HPC Series

■ FEATURES

- Excellent combination of high pressure and low flow, water-saving design.
- Electricity leakage protection makes operators fully safe.
- Ceramic plunger and dual water sealing structure make the machine long-lasting use.
- The function of automatic liquid mixing (foam liquid, wax water or disinfectant etc.) is optional with low pressure.
- The function of sand blasting and rotary spray is optional.

■ ACCESSORIES


Standard Accessories:

1. Inlet hose: ID 16mm, length 2.5m
2. Outlet hose: ID 6mm, length 10m, WP 600bar
3. Spray gun: 800mm long
4. Four straight nozzles (No.030): 0°, 15°, 25°, 40°
5. Power cable: YZW 3x1.5+1x1, 3 meters
6. Dual layered stainless steel filter x 1
7. Repair kit
8. English manual, full set of English labels, English packaging

■ SPECIFICATIONS

Model		HPC-141	HPC-152	HPC-203	HPC-204
Phase		1	1	3	3
Power Supply	kW	2.2	3.0	4.0	4.0
Voltage	V	110	220	220	380-415/440
Frequency	Hz	60	50/60	60	50/60
Working Pressure	bar	140	150	200	200
Flow Capacity	l/min.	9	10.8	12.8	12.8
IMPA Code		590857	590852	590855	590856
Uni-Code		0322095132	0322095152	0322095023	0309502100

■ EXPLOSION VIEW

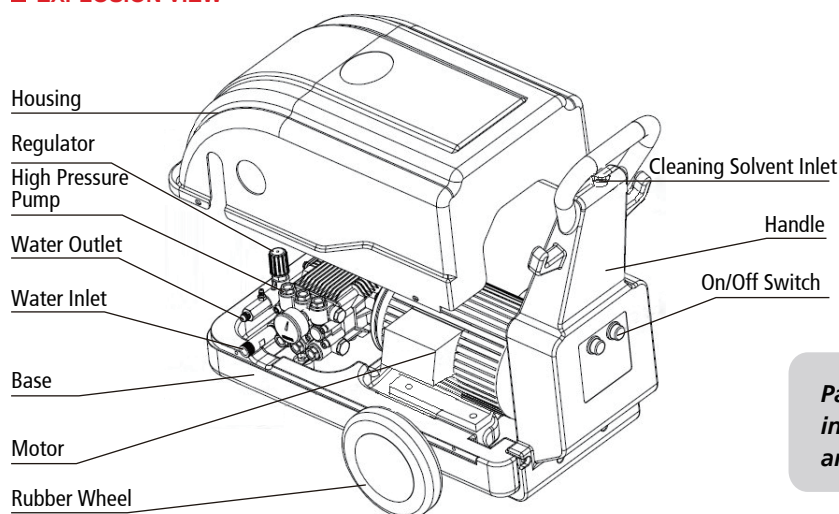

OPTIONAL ACCESSORIES

Function of automatic switch-off

15 or 20 meters of high pressure rubber hose

Power extension cable:

Extra long spray gun (1350mm)

Digital display of voltage and current

3-10m: 2.5 sq.mm / 10-30m: 4.0 sq.mm / 30-100m: 6.0 sq.mm

Particularly applicable for heavy machinery cleaning in construction, oil and chemical industry, marine and mining industry etc.